

LED Stadium Light



SR04



SR05



SR06

LED Wall Pack



WK04



HOT WK05



WK06

LED Area Light



HOT AR07



NEW AR05

LED Street Light



SL02



WK07



NEW WK08

LED UFO Highbay



HOT UFO07



UFO10



NEW UFO11

LED Garage Canopy Light



GP04



HOT GP06

LED Flood Light



HOT FD06



FD08

LED Linear Highbay



LHB06



HOT LHB07

LED Linear Strip Light



HOT SP05

LED Strip Retrofit Kit Light




SP04

LED Architectural Linear Light




LS01

LED Magnetic Linear Light



MST



TRS

LED Panel Light



BPL

LED Corn Light Bulb



FCL

LED Grow Light



GL-03

LED Troffer Light



TRF

LED Gas Station Light



GS05

LED Stadium Light



Features:

- 140LPW.
- 0-10V dimming.
- UL cUL DLC 5.1Premium listed.
- Die-cast aluminum housing with powder coat finish.
- UV stabilized polycarbonate lens.


SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Beam Angle	Input Voltage
LX-SR04-300W	300W	40500lm	3000K 4000K 5000K 5700K	> 70	15°25°40°60°	AC100-277V / AC277-480V
LX-SR04-400W	400W	54000lm			15°25°40°60°	
LX-SR04-500W	500W	67500lm			15°25°40°60°	
LX-SR04-600W	600W	81000lm			15°25°40°60°	
LX-SR04-800W	800W	108000lm			15°40°60°80°	
LX-SR04-1000W	1000W	135000lm			15°40°60°80°	
LX-SR04-1200W	1200W	162000lm			15°40°60°80°	




DIMENSIONS

300W-600W

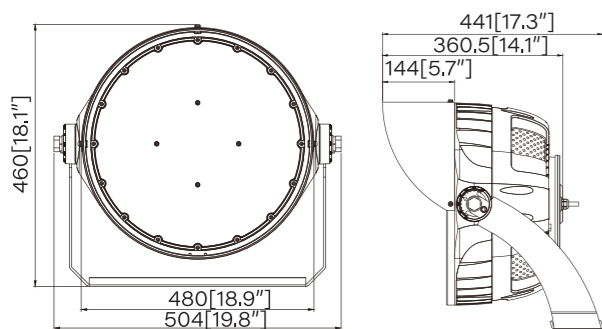

800W-1200W

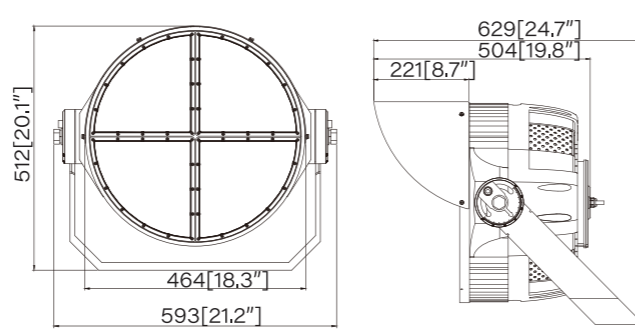

ADDITIONAL ACCESSORY



Laser

LED Stadium Light



Features:

- 150LPW.
- 0-10V dimming.
- UL cUL DLC 5.1Premium listed.
- Die-cast aluminum housing with powder coat finish.
- UV stabilized polycarbonate lens.




SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Beam Angle	Input Voltage
LX-SR05-400W	400W	60000lm	3000K 4000K 5000K 5700K	> 80	10°/25°/45°/60°/90°, asymmetric 60°	AC120-277V
LX-SR05-500W	500W	75000lm				
LX-SR05-600W	600W	90000lm				
LX-SR05-800W	800W	120000lm				
LX-SR05-1000W	1000W	150000lm				
LX-SR05-1200W	1200W	180000lm				
LX-SR05-1800W	1800W	270000lm				






DIMENSIONS




400W/500W/600W

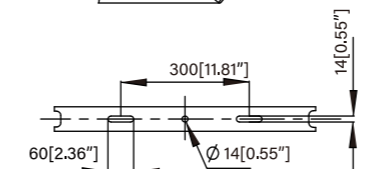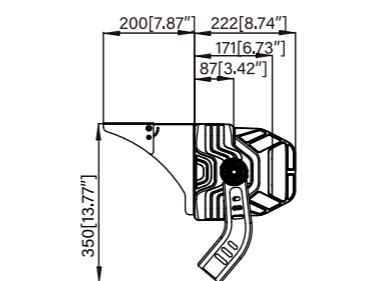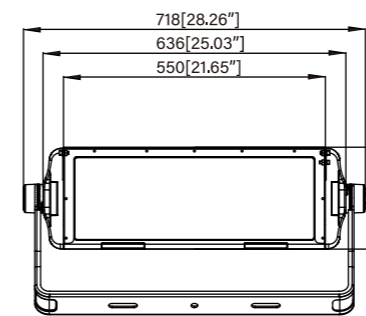

800W/1000W/1200W

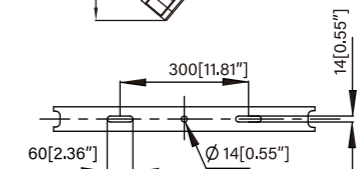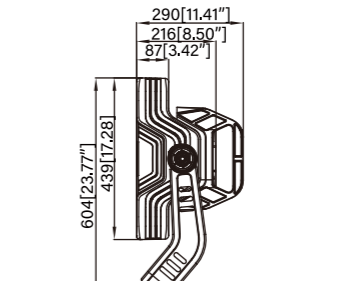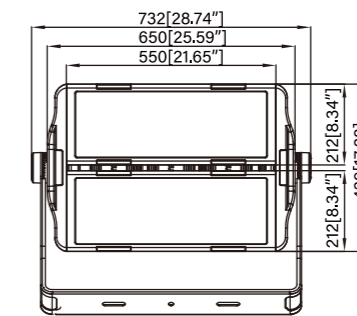

1500W/1800W

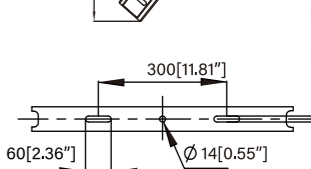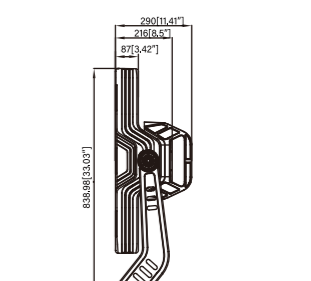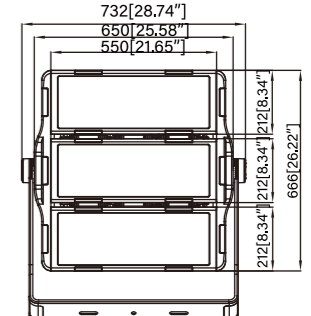

LED Stadium Light



Features:


- 150LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing with powder coat finish.
- UV stabilized polycarbonate lens.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Beam Angle	Input Voltage
LX-SR06-250W	250W	37500lm	3000K 4000K 5000K 5700K	> 80	10°/25°/45°/60°/90°/65°*25°	AC120-277V
LX-SR06-500W	500W	75000lm				
LX-SR06-750W	750W	112500lm				
LX-SR06-1000W	1000W	150000lm				
LX-SR06-1250W	1250W	180000lm				



DIMENSIONS

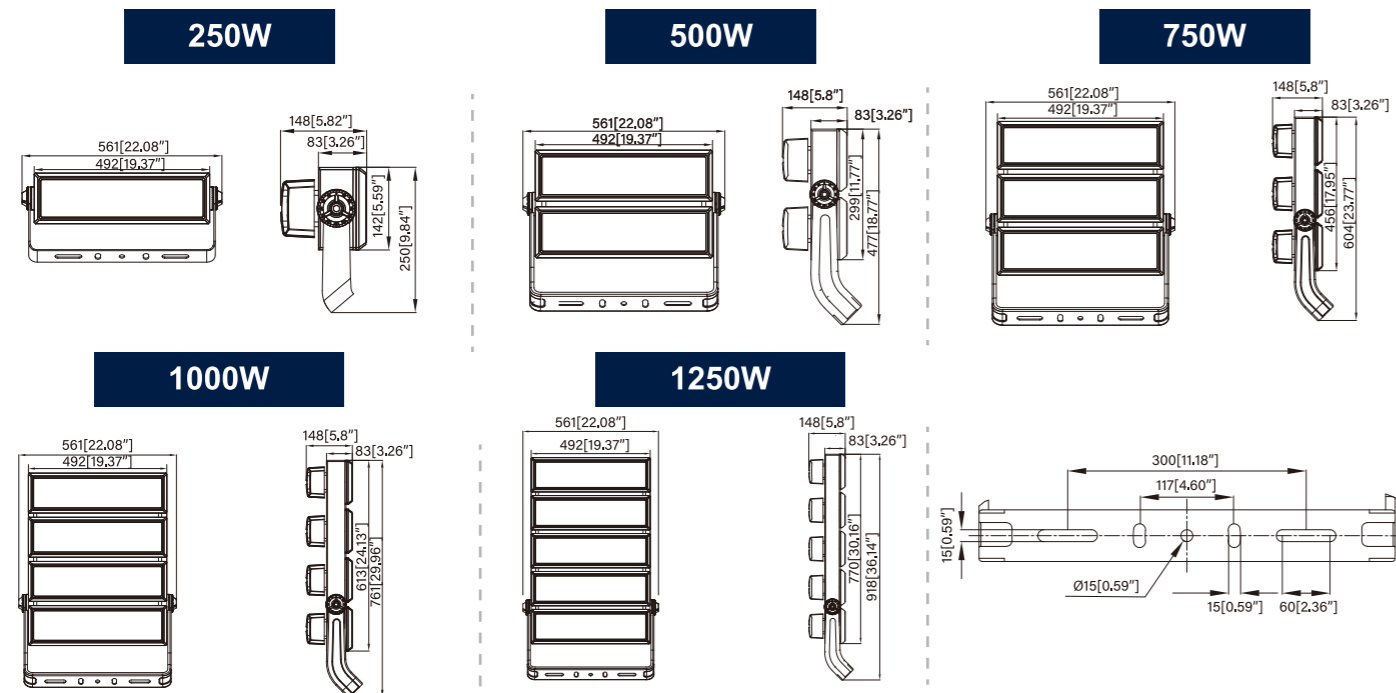

LED Area Light



HOT

3CCT
SELECTABLE

POWER
SELECTABLE

Features:


- 135LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing with powder coat finish.
- UV stabilized polycarbonate lens.
- High efficacy 150LPW, 170LPW Optional.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Distribution	Input Voltage
LX-AR07-100W	100W	13500lm	3000K 4000K 5000K 5700K	> 80	Type II / Type III / Type IV / Type V	AC100-277V / AC100-347V / AC277-480V
LX-AR07-150W	150W	20250lm				
LX-AR07-200W	200W	27000lm				
LX-AR07-240W	240W	32400lm				
LX-AR07-300W	300W	40500lm				
LX-AR07-400W	400W	54000lm				
LX-AR07-450W	450W	60750lm				
LX-AR07-500W	500W	67500lm				



DIMENSIONS

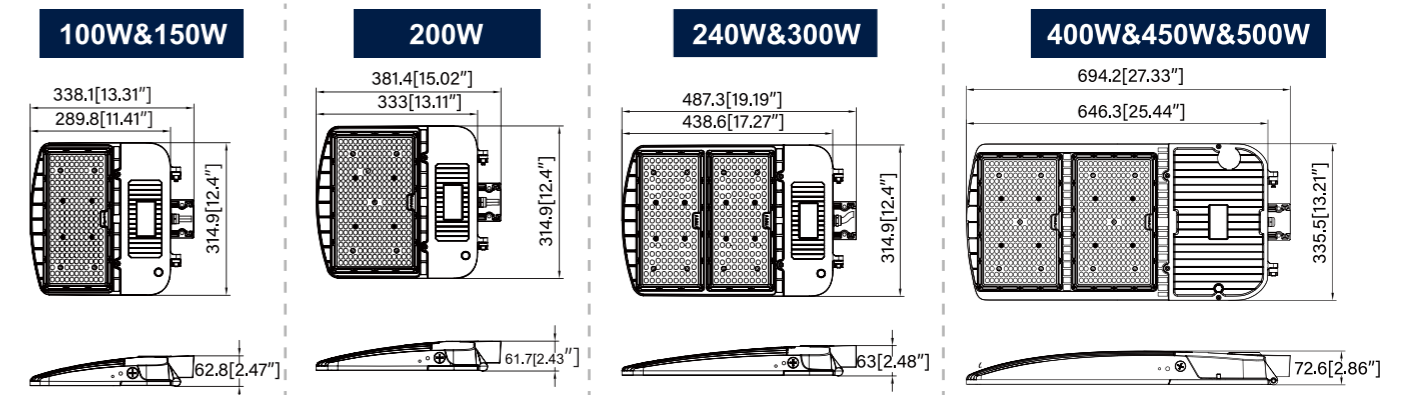

MOUNTING OPTIONS



ADDITIONAL ACCESSORY



LED Area Light

NEW



Features:


- 140LPW.
- 0-10V dimming.
- Rotatable lens.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing with powder coat finish.
- UV stabilized polycarbonate lens.
- High efficacy 150LPW, 170LPW Optional.

SPECIFICATIONS


Part No	Power	Luminous Flux	CCT	CRI	Distribution	Input Voltage
LX-AR05-100W	100W	13500lm	3000K 4000K 5000K 5700K	> 80	Type II / Type III / Type IV / Type V	AC100-277V / AC100-347V / AC277-480V
LX-AR05-150W	150W	20250lm				
LX-AR05-200W	200W	27000lm				
LX-AR05-240W	240W	32400lm				
LX-AR05-300W	300W	40500lm				



DIMENSIONS

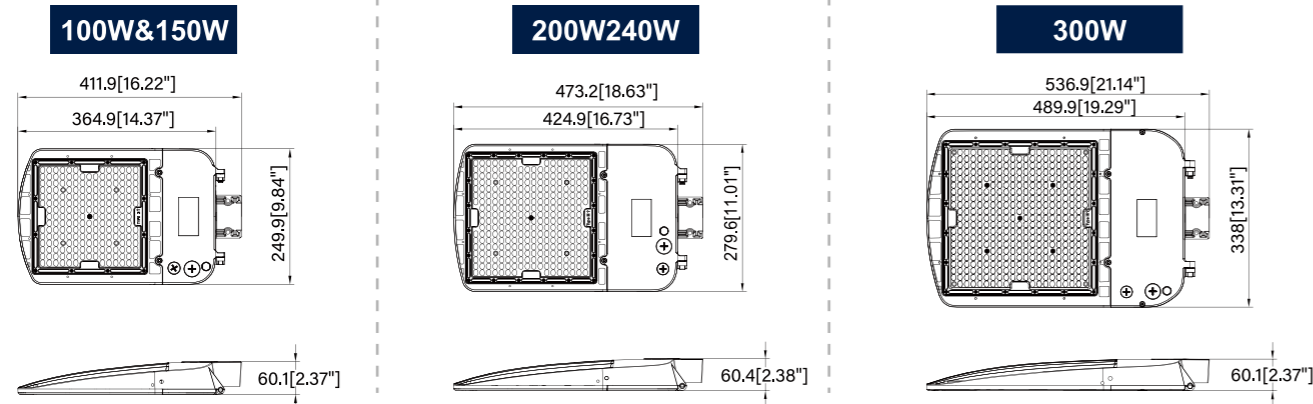

MOUNTING OPTIONS

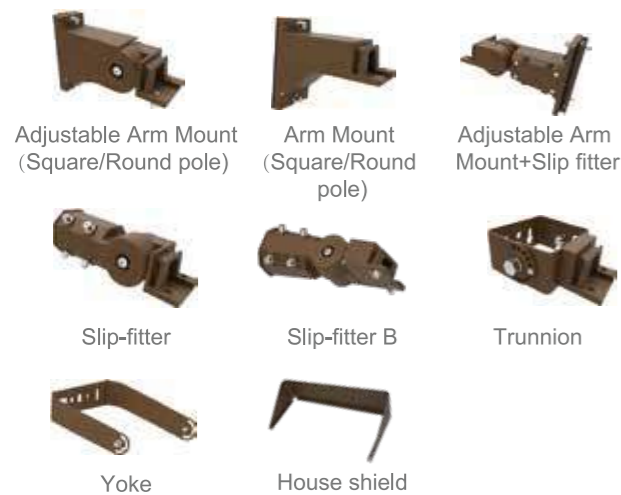

ADDITIONAL ACCESSORY



LED Street Light




SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Beam Angle	Input Voltage
LX-SL02-30W	30W	3900lm	3000K 4000K 5000K 5700K 6500K	> 80	Type II	AC120-277V
LX-SL02-50W	50W	6500lm				
LX-SL02-80W	80W	10400lm				
LX-SL02-100W	100W	13000lm				
LX-SL02-120W	120W	15600lm				
LX-SL02-150W	150W	19500lm				
LX-SL02-200W	200W	26000lm				



DIMENSIONS

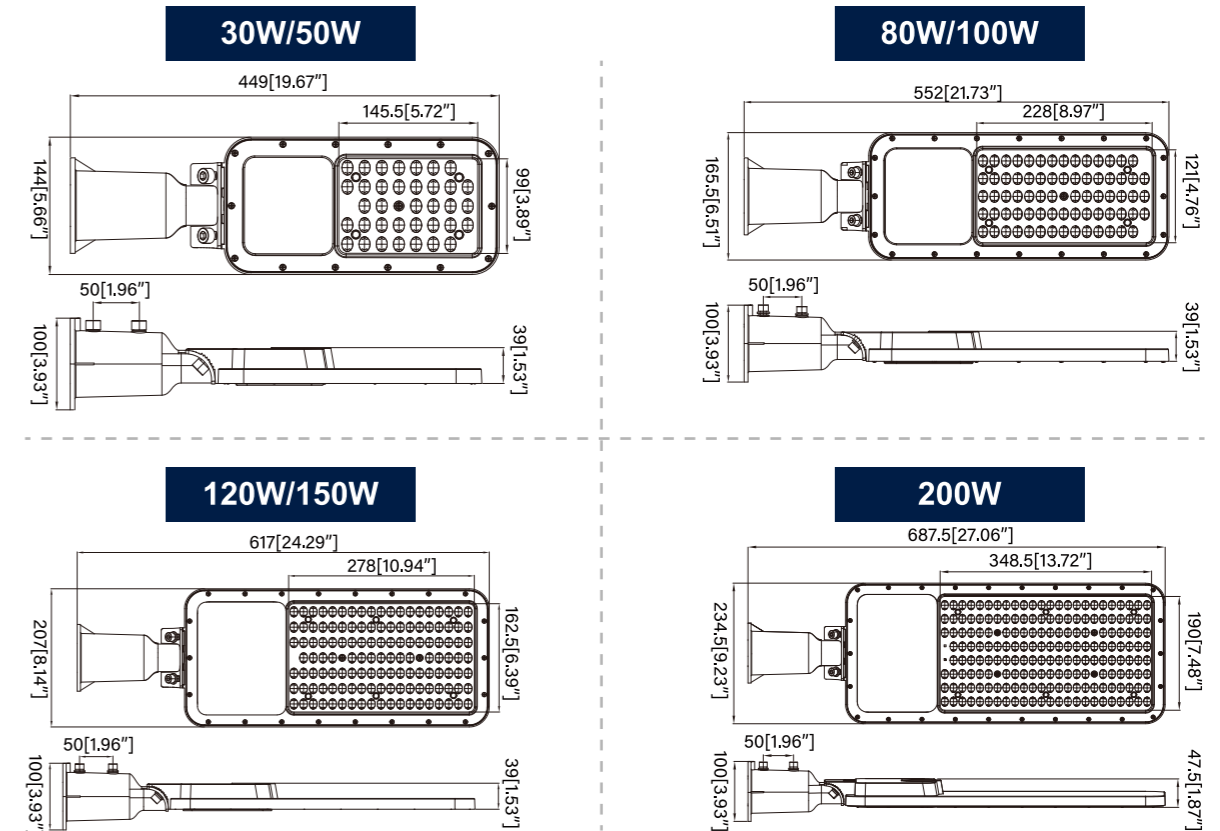

LED UFO Highbay Light

HOT



Features:

- 145LPW.
- UGR<28.
- IK08.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing with powder coat finish.
- High efficacy 150LPW, 170LPW Optional.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
LX-UFO07-60W	60W	8700lm	3000K 3500K 4000K 5000K 5700K	> 80	80° & 90°	AC100-277V / AC100-347V / AC277-480V
LX-UFO07-100W	100W	14500lm				
LX-UFO07-150W	150W	21750lm				
LX-UFO07-200W	200W	29000lm				
LX-UFO07-240W	240W	34800lm				
LX-UFO07-300W	300W	43500lm				



DIMENSIONS

	A	B	C
60W/80W/100W	160.5[6.32"]	112[4.41"]	260[10.24"]
150W	167[6.57"]	118.5[4.67"]	280[11.02"]
200W/240W	176[6.93"]	127.5[5.02"]	338[13.31"]
300W	184.5[7.26"]	136[5.35"]	338[13.31"]
300W(HV)	185.9[7.32"]	137.5[5.41"]	338[13.31"]

Rings type

ADDITIONAL ACCESSORY



LED UFO Highbay Light

NEW



Features:

- 140LPW.
- UGR<28.
- IK08.
- 0-10V dimming.
- ETL DLC 5.1 Premium listed.
- Die-cast aluminum housing with powder coat finish.
- High efficacy 150LPW, 170LPW Optional.

SPECIFICATIONS


Part No	Power Selectable	Luminous Flux	3CCT Selectable	CRI	Viewing Angle	Input Voltage
LX-UFO10-100/80/60W	100/80/60W	14000lm	35K/40K/50K	> 80	80°	AC120-277V / AC120-347V
LX-UFO10-150/120/100W	150/120/100W	21000lm				
LX-UFO10-240/200/150W	240/200/150W	33600lm				



DIMENSIONS

100W	150W	240W
260[10.24"]	280[11.02"]	338[13.31"]
145.5[5.73"] 80.8[3.18"]	145.5[5.73"] 80.8[3.18"]	147.5[5.81"] 82.8[3.26"]

ADDITIONAL ACCESSORY

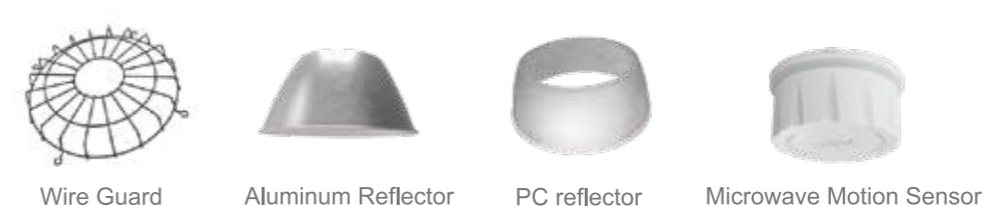

LED UFO Highbay Light

NEW



Features:


- 150LPW.
- UGR<28.
- IK08.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing with powder coat finish.
- High efficacy 150LPW, 170LPW Optional.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
LX-UFO11-100W	100W	15000lm	3500K 4000K 5000K 5700K	> 80	80°	AC120-277V / AC120-347V
LX-UFO11-150W	150W	22500lm				
LX-UFO11-200W	200W	30000lm				
LX-UFO11-240W	240W	36000lm				



DIMENSIONS

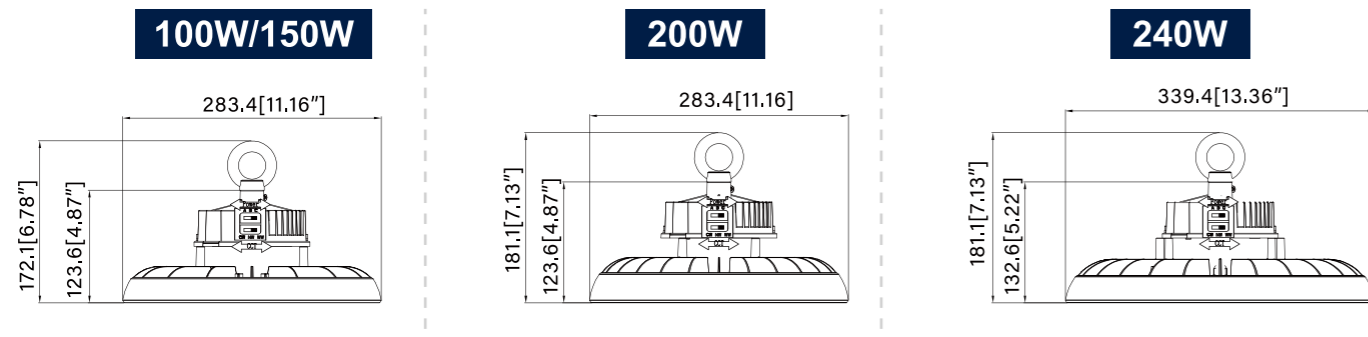

ADDITIONAL ACCESSORY



LED Flood Light

HOT



Features:


- 145LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing with powder coat finish.
- Glass lens.
- Selectable photocell.
- Bean angle:7HX6V.

SPECIFICATIONS

Part No	Power Selectable	Luminous Flux	3CCT Selectable	CRI	Input Voltage
LX-FD06-35/25/15W	35/25/15W	5075lm	30K/40K/50K	> 80	AC120-277V / AC120-347V
LX-FD06-80/60/40W	80/60/40W	11600lm			
LX-FD06-150/120/100W	150/120/100W	21750lm			



DIMENSIONS

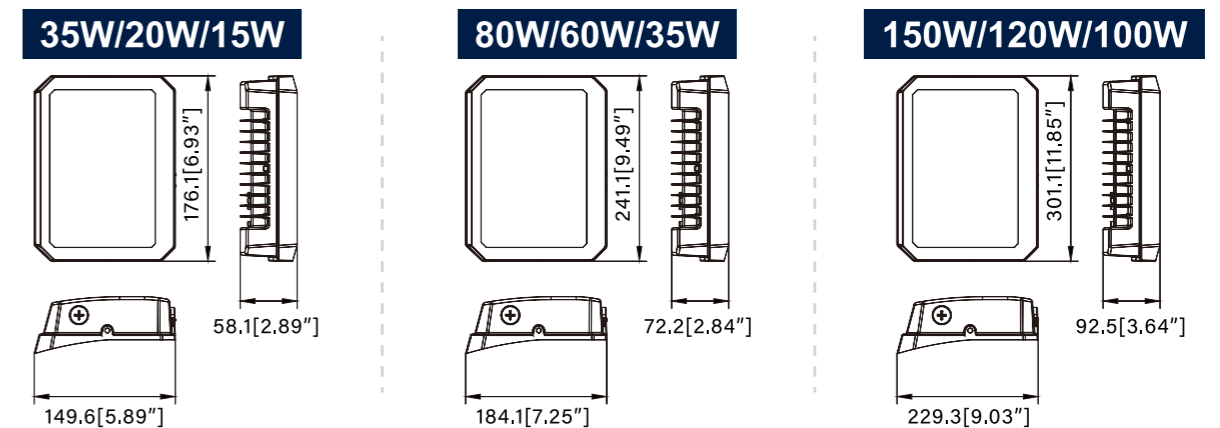

ADDITIONAL ACCESSORY



LED Flood Light



Features:


- 135LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- UV stabilized polycarbonate lens.
- Selectable photocell.
- Beam angle:7HX6V.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Input Voltage
LX-FD08-15W	15W	2025lm	3000K 4000K 5000K 5700K	>80	AC120-277V / AC120-347V
LX-FD08-30W	30W	4050lm			
LX-FD08-50W	50W	6750lm			
LX-FD08-70W	70W	9450lm			
LX-FD08-90W	90W	12150lm			
LX-FD08-30/20/15W	30/20/15W	4050lm			
LX-FD08-50/40/30W	50/40/30W	6750lm			
LX-FD08-100/80/60W	100/80/60W	13500lm			



DIMENSIONS

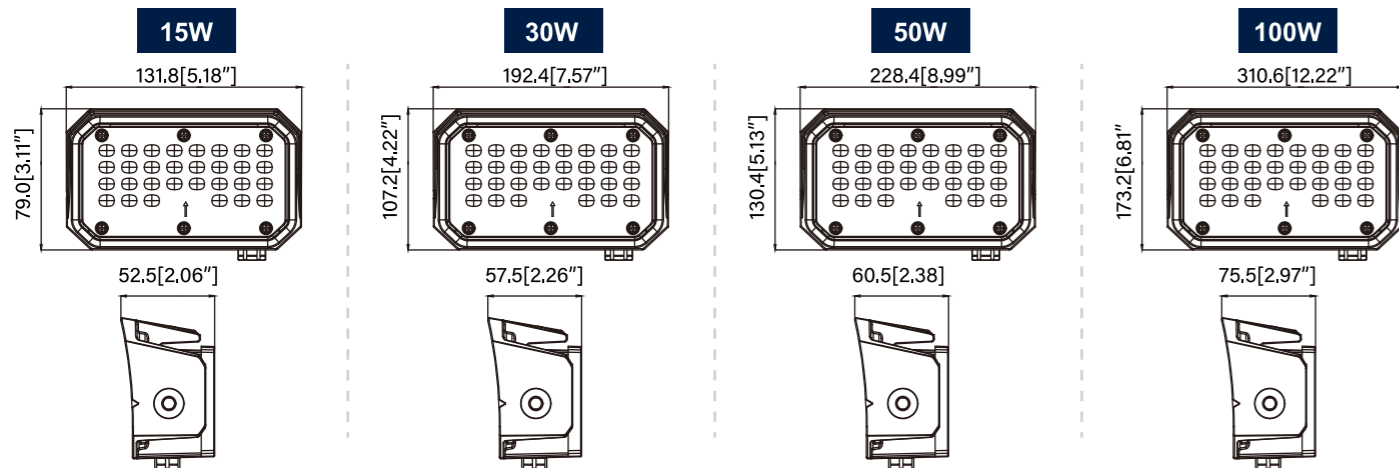

ADDITIONAL ACCESSORY



LED Traditional Wall Pack



Features:


- 135LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing and glass lens.
- Photocell controllable.

SPECIFICATIONS


Part No	Power	Luminous Flux	CCT	CRI	Input Voltage
LX-WK04-40W	40W	5400lm	3000K 4000K 5000K 5700K	>80	AC120-277V / AC120-347V / AC277-480V
LX-WK04-60W	60W	8100lm			
LX-WK04-80W	80W	10800lm			
LX-WK04-100W	100W	13500lm			
LX-WK04-120W	120W	16200lm			



DIMENSIONS

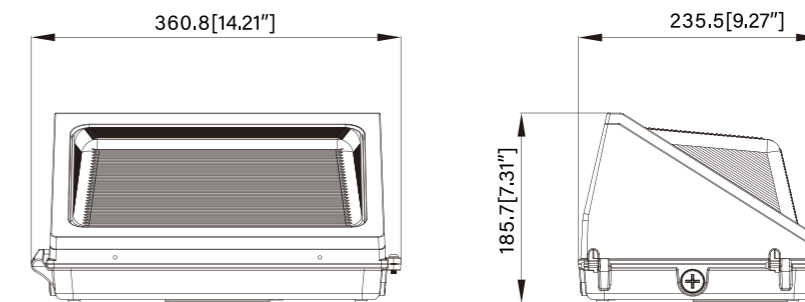

ADDITIONAL ACCESSORY

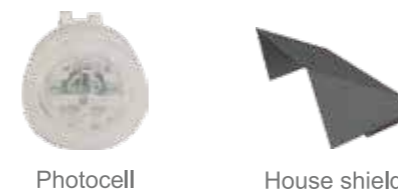

LED Slim Wall Pack

HOT



Features:


- 130LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing and glass lens.
- Selectable photocell.

SPECIFICATIONS

Part No	Power Selectable	Luminous Flux	CCT Selectable	CRI	Input Voltage
LX-WK0506G-60/40/30W	60/40/30W	7800lm	30K/40K/50K	> 70	AC120-277V / AC120-347V
LX-WK0506G-120/100/80W	120/100/80W	15600lm			AC277-480V



DIMENSIONS

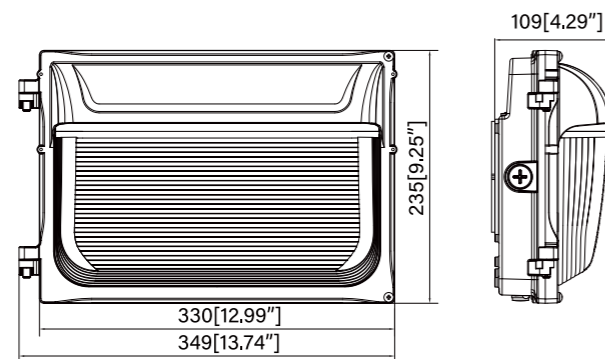

ADDITIONAL ACCESSORY



House shield



Photocell

LED Adjustable Wall Pack



Features:


- 125LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Aluminum housing and UV resistant polycarbonate lens.
- Photocell controllable.

SPECIFICATIONS

Part No	Power	Luminous flux	CCT	CRI	Input Voltage
LX-WK06-40/30/20W	40/30/20W	5000lm	3000K 4000K 5000K 5700K	> 80	AC120-277V / AC120-347V
LX-WK06-80/60/40W	80/60/40W	10000lm			
LX-WK06-120/100/80W	120/100/80W	15000lm			



DIMENSIONS

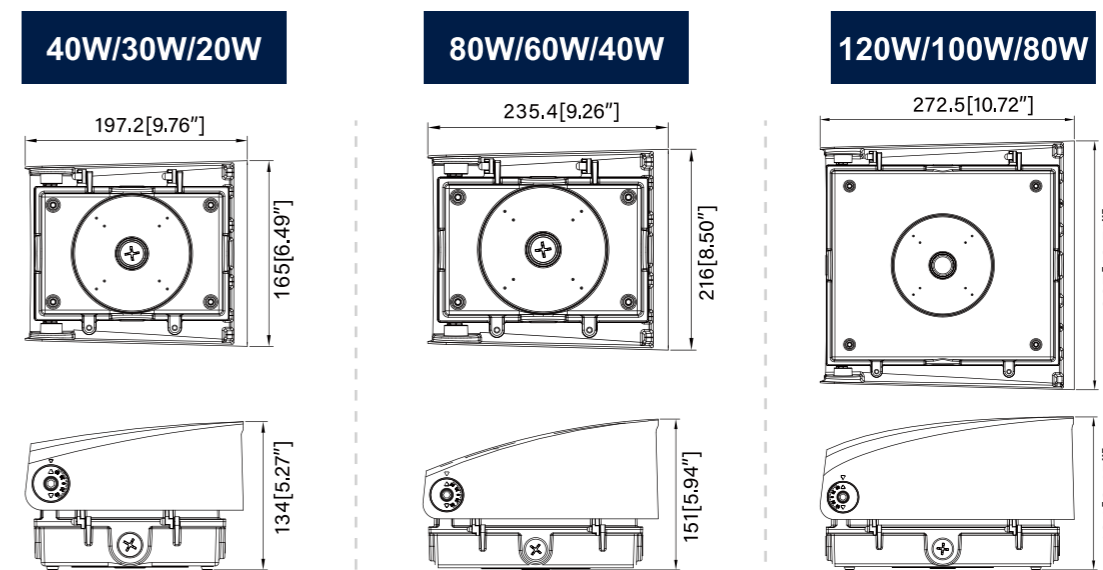

ADDITIONAL ACCESSORY



Photocell

LED Full Cut-Off Wall Pack



Features:


- 135LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Aluminum housing and UV resistant polycarbonate lens.
- Photocell controllable.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Input Voltage
LX-WK07-40/30/20W	40/30/20W	5400lm	3000K 4000K 5000K 5700K	> 80	AC120-277V / AC120-347V / AC277-480V
LX-WK07-80/60/40W	80/60/40W	10800lm			
LX-WK07-100/80/60W	100/80/60W	13500lm			



DIMENSIONS

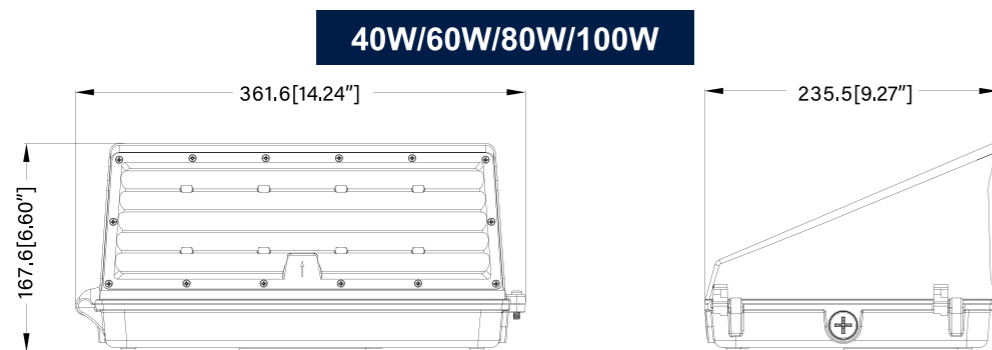

ADDITIONAL ACCESSORY



Photocell

LED Wall Pack



Features:


- 130LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Die-cast aluminum housing and glass lens.
- Photocell controllable.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Input Voltage
LX-WK08-40W	40W	5200lm	3000K 4000K 5000K 5700K	> 80	AC120-277V / AC120-347V / AC277-480V
LX-WK08-60W	60W	7800lm			
LX-WK08-80W	80W	10400lm			
LX-WK08-100W	100W	13000lm			
LX-WK08-120W	120W	15600lm			



DIMENSIONS

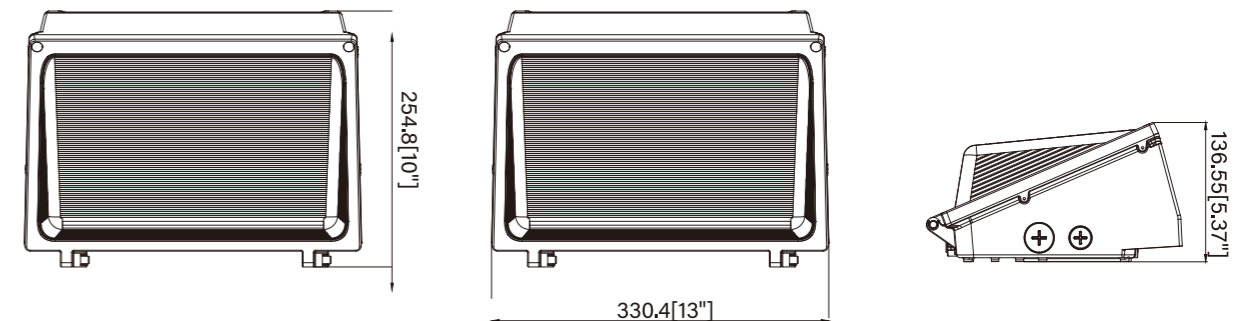

ADDITIONAL ACCESSORY



House Shield



Photocell

LED Garage Canopy Light



Features:


- 135LPW.
- UGR<28.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Aluminum housing and Low glare, UV resistant polycarbonate lens.
- Pendant and surface mount.

SPECIFICATIONS


Part No	Power	Luminous Flux	3CCT	CRI	Viewing Angle	Input Voltage
LX-GP04-40/30/20W	40/30/20W	5400lm	35K/40K/50K	> 80	150°	AC120-277V / AC120-347V
LX-GP04-80/60/40W	80/60/40W	10800lm				
LX-GP04-100/80/60W	100/80/60W	13500lm				



DIMENSIONS

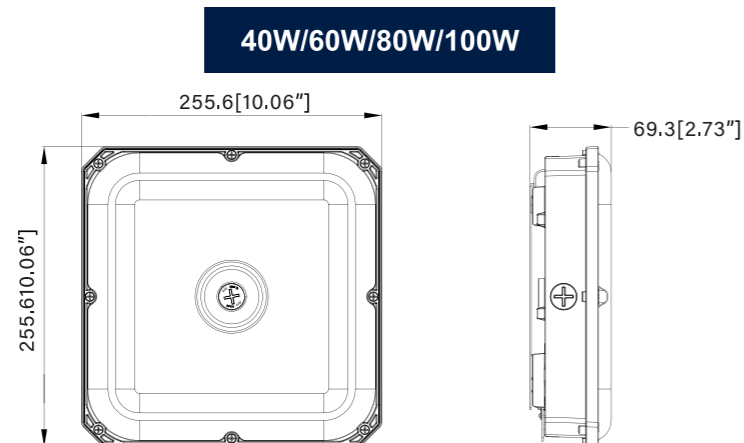

ADDITIONAL ACCESSORY

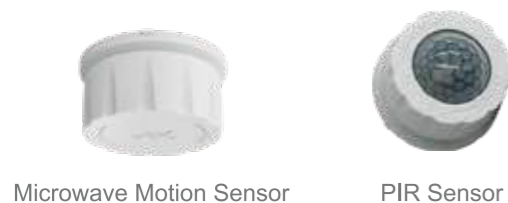

Microwave Motion Sensor PIR Sensor

LED Garage Canopy Light



Features:


- 135LPW.
- UGR<28.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Aluminum housing and Low glare, UV resistant polycarbonate lens.
- Pendant and surface mount.

SPECIFICATIONS

Part No	Power Selectable	Luminous Flux	3CCT Selectable	CRI	Viewing Angle	Input Voltage
LX-GP06-40/30/20W	40/30/20W	5400lm	35K/40K/50K	> 80	140°	AC120-277V / AC120-347V
LX-GP06-80/60/40W	80/60/40W	10800lm				
LX-GP06-100/80/60W	100/80/60W	13500lm				



DIMENSIONS

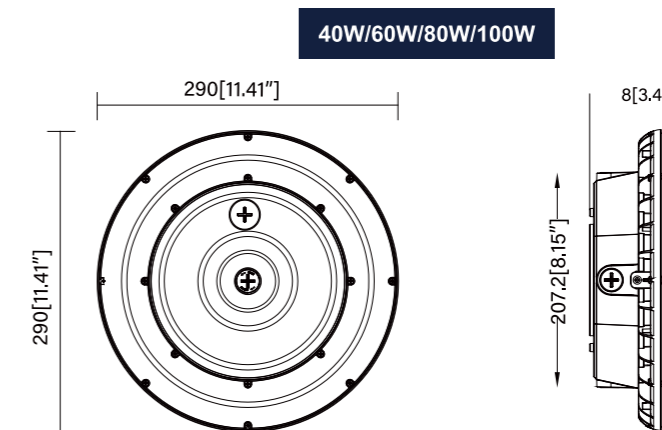

ADDITIONAL ACCESSORY



Microwave Motion Sensor Microwave Motion Sensor (Zhaga) PIR Sensor

LED Linear Highbay Light



Features:


- 145LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- 4 FT: 225W and 300W.
- 2 FT: 80W, 110W, 160W and 220W.
- Microwave Motion Sensor, PIR Sensor Controller options.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
LX-LHB06-80W	80W	11600lm	3500K 4000K 5000K 5700K	> 80	90°	AC120-277V / AC120-347V / AC277-480V
LX-LHB06-110W	110W	15950lm				
LX-LHB06-165W	165W	23925lm				
LX-LHB06-220W	220W	31900lm				
LX-LHB06-225W	225W	32625lm				
LX-LHB06-300W	300W	43500lm				



DIMENSIONS

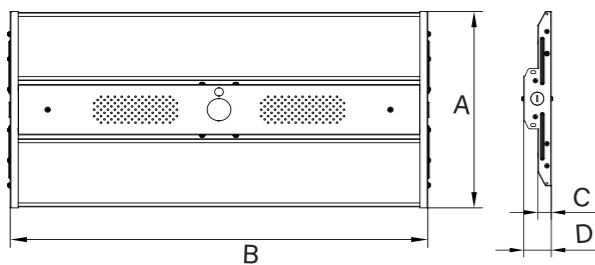

Part No.	A	B	C	D
LHB06-80W	299.9 [11.81"]	599.9 [23.62"]	23.1 [0.91"]	47.4 [1.87"]
LHB06110W				
LHB06-165W				
LHB06-220W	359.9 [14.17"]	599.9 [23.62"]	23.1 [0.91"]	47.4 [1.87"]
LHB06-225W	359.9 [14.17"]	599.9 [23.62"]	23.1 [0.91"]	47.4 [1.87"]
LHB06-300W	359.9 [14.17"]	599.9 [23.62"]	23.1 [0.91"]	47.4 [1.87"]

ADDITIONAL ACCESSORY



Microwave Motion Sensor



PIR Sensor



Microwave Motion Sensor (Zhaga)

LED Linear Highbay Light




Features:


- 145LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- 4 FT: 225W and 300W.
- 2 FT: 80W, 110W, 160W and 220W.
- Microwave Motion Sensor, PIR Sensor Controller options.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
LX-LHB07-80W	80W	11600lm	3500K 4000K 5000K 5700K	> 80	90°	AC120-277V / AC120-347V / AC277-480V
LX-LHB07-110W	110W	15950lm				
LX-LHB07-165W	160W	23200lm				
LX-LHB07-220W	220W	31900lm				
LX-LHB07-225W	225W	32625lm				
LX-LHB07-300W	300W	43500lm				



DIMENSIONS

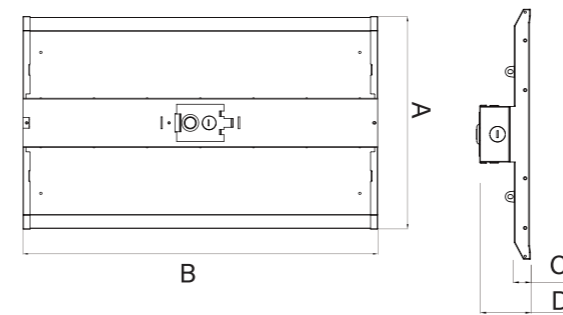

Part No.	A	B	C	D
LHB07-80W	300 [11.8"]	600.5 [23.64"]	23 [0.91"]	73.5 [2.89"]
LHB07-110W				
LHB07-160W				
LHB07-220W	360 [14.17"]	600.5 [23.64"]	23 [0.91"]	73.5 [2.89"]
LHB07-225W	360 [14.17"]	600.5 [23.64"]	23 [0.91"]	73.5 [2.89"]
LHB07-300W	360 [14.17"]	600.5 [23.64"]	23 [0.91"]	73.5 [2.89"]

ADDITIONAL ACCESSORY



Microwave Motion Sensor



PIR Sensor

LED Linear Strip Light

HOT



Features:


- 130LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- 4 FT: 225W and 300W.
- 2 FT: 80W, 110W, 160W and 220W.
- Microwave Motion Sensor, PIR Sensor Controller options.

SPECIFICATIONS

Part No	Power Selectable	Luminous Flux	3CCT Selectable	CRI	Viewing Angle	Input Voltage
LX-SP05-4FT-40/32/24W	40/32/24W	5400lm	35K/40K/50K	> 80	120°	AC120-277V / AC120-347V
LX-SP05-8FT-64/50/40W	64/50/40W	8640lm				
LX-SP05-8FT-80/70/60W	80/70/60W	10800lm				



DIMENSIONS

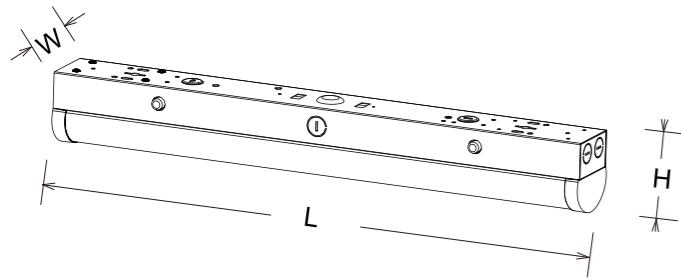

Model	LxWxH
SP05-2FTXX	609x74x83(mm)/23.98"x2.91"x3.24"
SP05-4FTXX	1185x74x83(mm)/46.65"x2.91"x3.27"
SP05-8FTXX	2438x74x83(mm)95.98"x2.91"x3.27"

ADDITIONAL ACCESSORY




PIR Sensor



Built-in Motion Sensor

LED Architectural Linear Light




SPECIFICATIONS

Part No	Power Selectable	Luminous Flux	3CCT Selectable	CRI	Luminous Efficacy	Input Voltage
LX-LS01-4FT-40/32/24W	40/32/24W	4400LM	35K/40K/50K	> 80	110lm/W	AC100-277V / AC100-347V
LX-LS01-4FT-50/40/30W	50/40/30W	5500LM				



DIMENSIONS

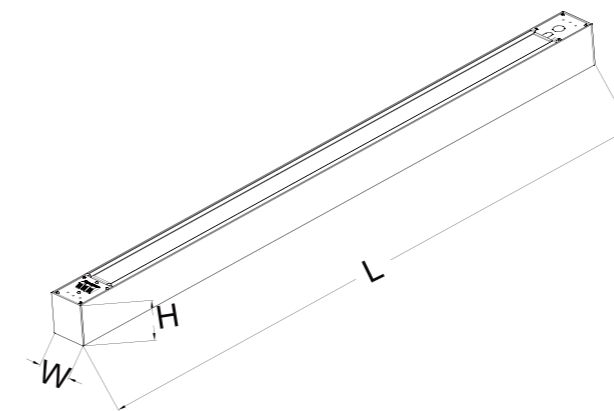

Model	LxWxH
LS01-4FT40/32/24W	1219.2x70x80(mm)/48"x2.75"x3.14"
LS01-4FT50/40/30 W	

MOUNTING OPTIONS



X linear lamp




T linear lamp



L linear lamp

LED Panel Light

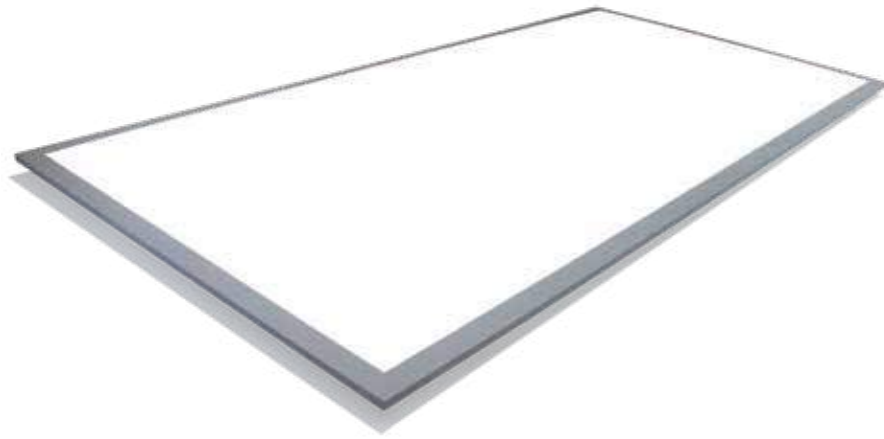


SPECIFICATIONS

Part No	Power Selectable	Luminous Flux	3CCT Selectable	CRI	Viewing Angle	Input Voltage
LX-BPL14-40/ 30/25/20/15W	40/30/25/ 20/15W	5000lm	35K/40K/50K	>80	120	AC120-277V / AC120-347V
LX-BPL22-40/ 30/25/20/15W	40/30/25/ 20/15W	5000lm				
LX-BPL24-50/ 40/35/30/25W	50/40/35/ 30/25W	6250lm				



DIMENSIONS

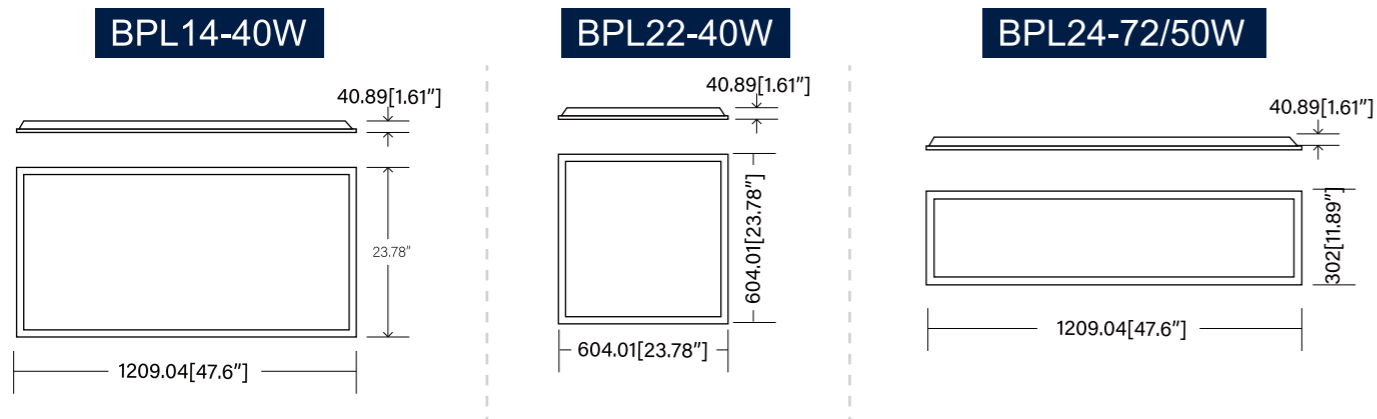

LED Troffer Light




SPECIFICATIONS

Part No	Power Selectable	Luminous Flux	3CCT Selectable	CRI	Viewing Angle	Input Voltage
LX-TRF14-35/ 30/25/20/15W	35/30/25/ 20/15W	110lm	35K/40K/50K	>80	120	AC120-277V / AC120-347V
LX-TRF22-35/ 30/25/20/15W	35/30/25/ 20/15W					
LX-TRF24-45/ 40/35/30/25W	45/40/35/ 30/25W					



DIMENSIONS

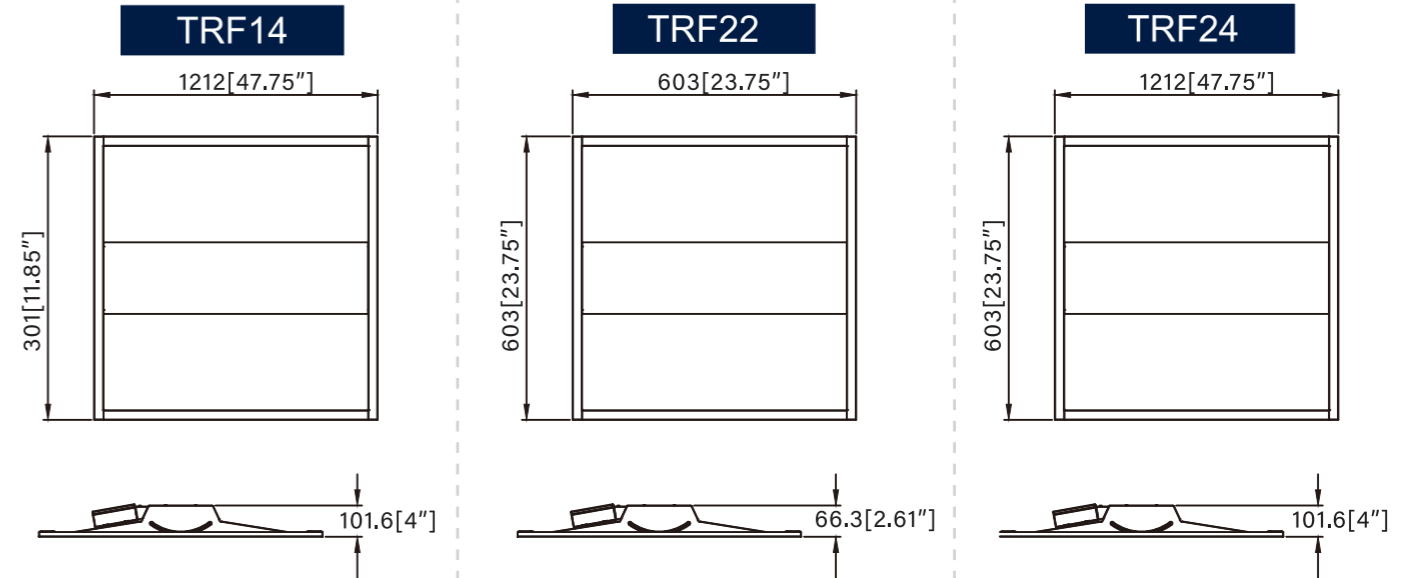


LED Strip Retrofit Kit Light




SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
LX-SP04-4FT-24W	24W	3210lm	3500K 4000K 5000K 5700K	>80	120	AC100-277V
LX-SP04-4FT-40W	40W	5200lm				
LX-SP04-8FT-40W	40W	5200lm				
LX-SP04-8FT-48W	48W	6240lm				
LX-SP04-8FT-50W	50W	6500lm				
LX-SP04-8FT-60W	60W	7800lm				
LX-SP04-8FT-64W	64W	8320lm				
LX-SP04-8FT-80W	80W	10400lm				




DIMENSIONS

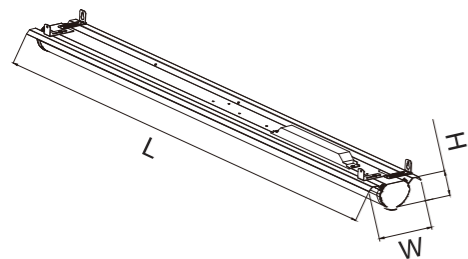

Model	LxWxH
SP04-4FT	1255x183x120(mm)/49.4"x7.2"x4.7"
SP04-8FT	2470x183x120(mm)/97.2"x7.2"x4.7"

LED Magnetic Linear Light

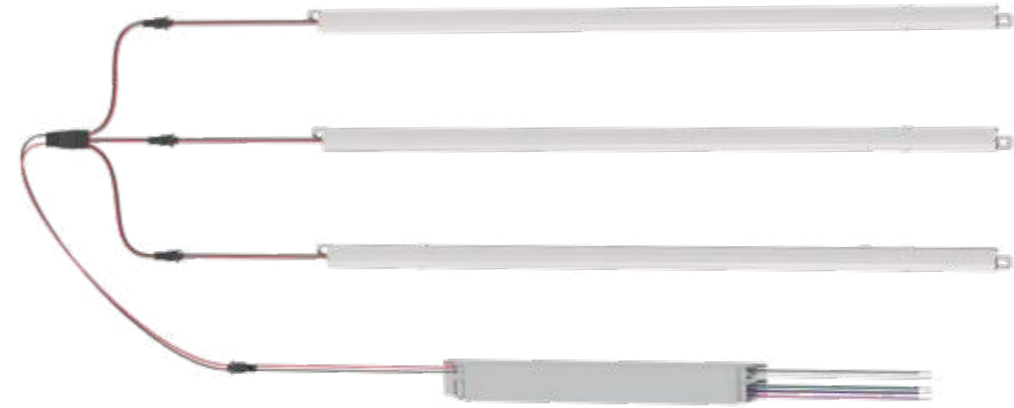


SPECIFICATIONS


Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
LX-MST120-2FT-20W	20W	3000lm	3500K 4000K 5000K 5700K	>80	100°	AC100-277V
LX-MST120-2FT-30W	30W	4500lm				
LX-MST120-2FT-40W	40W	6000lm				
LX-MST120-4FT-24W	24W	3600lm				
LX-MST120-4FT-24W	30W	4500lm				
LX-MST120-4FT-24W	40W	6000lm				
LX-MST120-4FT-24W	45W	6750lm				
LX-MST120-4FT-60W	60W	9000lm				
LX-MST120-8FT-60W	60W	9000lm				
LX-MST120-8FT-80W	80W	12000lm				



DIMENSIONS

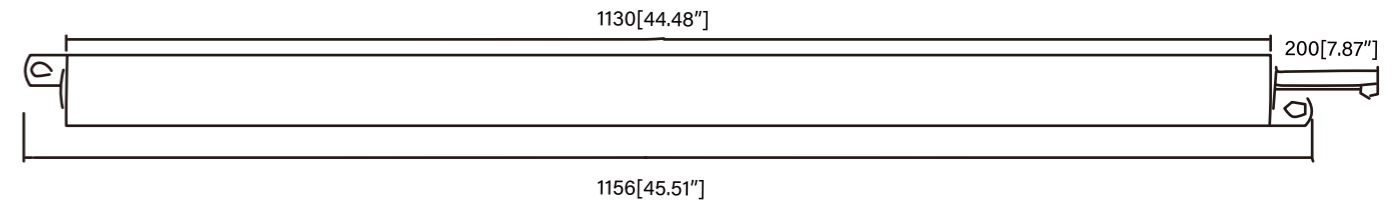


LED Magnetic Linear Light

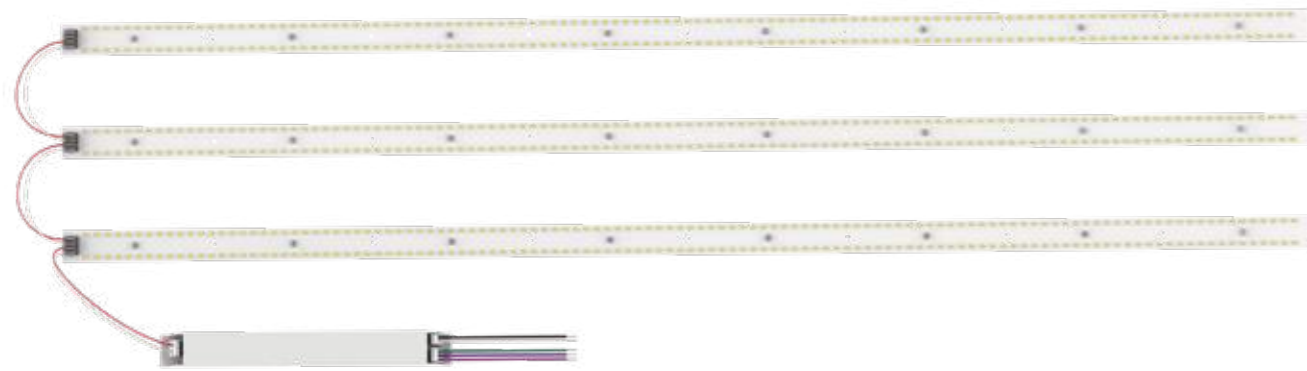


SPECIFICATIONS


Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
TRS2X2-2FT	40W	130lm	3500K 4000K 5000K 5700K	>80	120	AC100-277V
TRS1*4-4FT	30W	130lm				
TRS2*4-4FT	50W	130lm				



DIMENSIONS

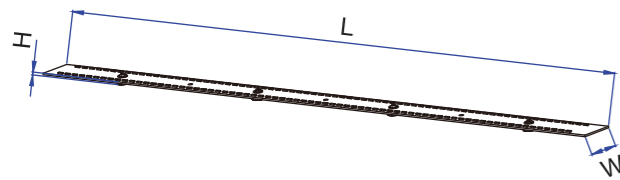

Part No.	L	W	H
TRS2X2-40W	530[20.87"]	84.07[3.31"]	6.09[0.24"]
TRS1*4-30W	1060[41.73"]	84.07[3.31"]	6.09[0.24"]
TRS2*4-50W			

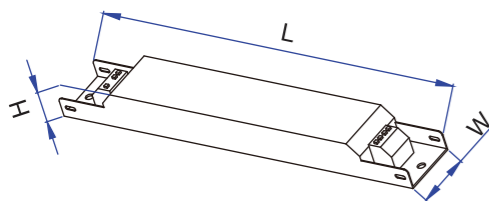

Driver Size

Part No.	L	W	H
TRS2X2-40W	277.6[10.93"]	29.9[1.18"]	22.09[0.87"]
TRS1*4-30W	344.9[13.58"]	29.9[1.18"]	23.87[0.94"]
TRS2*4-50W			

LED Corn Light Bulb




SPECIFICATIONS

Part No	Power	Luminous Flux	CRI	PPE	PPF	Viewing Angle	Input Voltage
LX-FCL-25W	25W	2625lm	> 80	1.9 μmol/J	47.5 μmol/s	90°	AC100-277V
LX-FCL-40W	40W	4200lm		1.9 μmol/J	76 μmol/s		
LX-FCL-60W	60W	6300lm		1.9 μmol/J	114 μmol/s		
LX-FCL-80W	80W	8400lm		1.9 μmol/J	152 μmol/s		
LX-FCL-100W	100W	10500lm		1.9 μmol/J	190 μmol/s		




DIMENSIONS

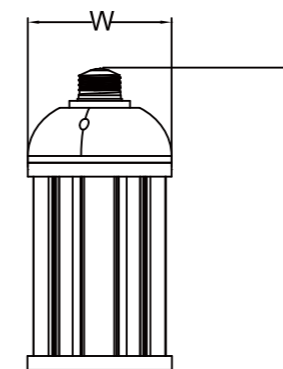

Model	Diameter
FCL25W	70x120(mm)/2.76"x1.72"
FCL40/60W	90x220(mm)/3.54"x8.66"
FCL80/100W	105x255(mm)/4.13"x10.04"

LED Grow Light

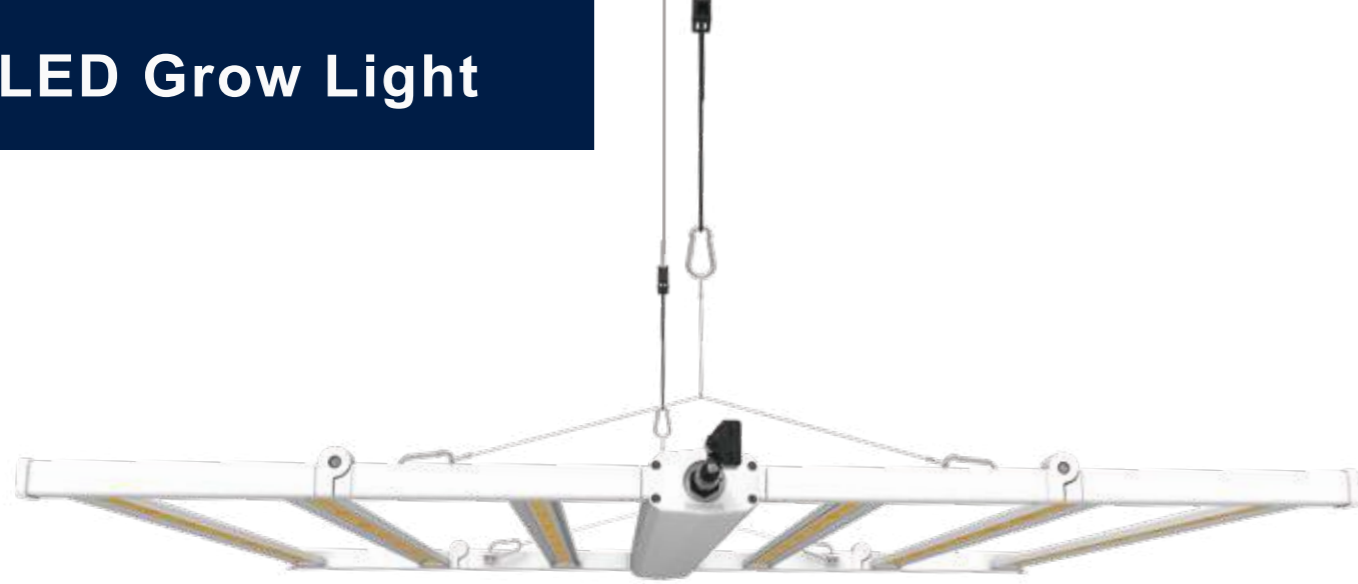


SPECIFICATIONS

Part No	Power	Luminous Flux	PPE	CRI	Spectrum	Input Voltage
GL-03-320-H-ID-10D	320W	832 μ mol/s	2.6 μ mol/J	> 80	Customize Spectrum 120°	AC120-277V
GL-03-420-H-ID-10D	420W	1092 μ mol/s				
GL-03-740-H-ID-10D	740W	1924 μ mol/s				
GL-03-1000-H-ID-10D	1000W	2600 μ mol/s				



DIMENSIONS

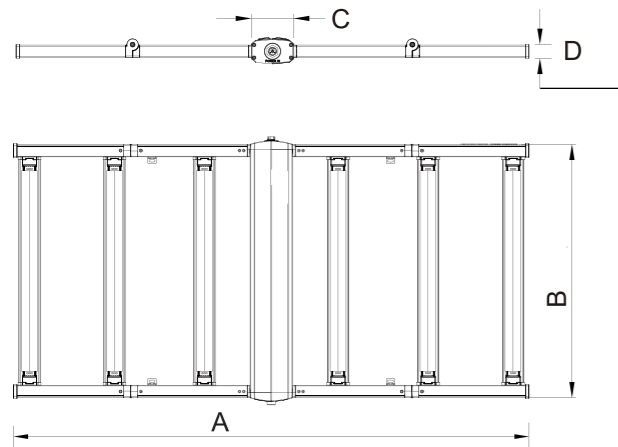

Part No.	A	B	C	D
GL-03-320	1219.4[48.01"]	600[23.62"]	100[3.94"]	33.8[1.33"]
GL-03-420	1219.4[48.01"]	900[35.43"]	100[3.94"]	33.8[1.33"]
GL-03-740	1219.4[48.01"]	1092[42.99"]	100[3.94"]	33.8[1.33"]
G-03-1000	182.8[71.96"]	1092[42.99"]	100[3.94"]	33.8[1.33"]

LED Gas Station Light



Features:

- 135LPW.
- 0-10V dimming.
- UL cUL DLC 5.1 Premium listed.
- Aluminum housing and Low glare, UV resistant polycarbonate lens.
- Pendant and surface mount.

SPECIFICATIONS

Part No	Power	Luminous Flux	CCT	CRI	Viewing Angle	Input Voltage
LX-GS0510-100W	100W	13500lm	3500K 4000K 5000K 5700K	> 80	110°	AC100-277V
LX-GS0515-150W	150W	20250lm				
LX-GS0515-200W	200W	27000lm				



DIMENSIONS

